

09-25-00

A

09/22/00

JC972 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
44400.010100

Total Pages in this Submission

74

TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

METHOD AND APPARATUS FOR ARCHIVING MEDIA CONTENT

and invented by:

Joachim KimJC913 U.S. PTO
09/668700

09/22/00

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 44 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
44400.010100

Total Pages in this Submission
74

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
a. ☐ Formal b. ☒ Informal Number of Sheets 5
4. ☒ Oath or Declaration
a. ☒ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
c. ☒ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission (if applicable, all must be included)
a. ☐ Paper Copy
b. ☐ Computer Readable Copy
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & documents)
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
☐ First Class ☒ Express Mail (Specify Label No.): EM074605931US

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
44400.010100

Total Pages in this Submission
74

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 2
17. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	3	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$345.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **501561** as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of **\$345.00** as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 09/22/00


Signature

Vincent Serrao
Reg. No. 47,072

cc:

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) AND 1.27 (c)) - SMALL BUSINESS CONCERN			Docket No. 44409.010100
Serial No. TBA	Filing Date 09/22/00	Patent No. TBA	Issue Date TBA
Applicant/ Patentee: Joachim Kim			
Invention: METHOD AND APPARATUS FOR ARCHIVING MEDIA CONTENT			
<p>I hereby declare that I am:</p> <p><input type="checkbox"/> the owner of the small business concern identified below:</p> <p><input checked="" type="checkbox"/> an official of the small business concern empowered to act on behalf of the concern identified below:</p> <p>NAME OF CONCERN: <u>Digital Connection LLC</u></p> <p>ADDRESS OF CONCERN: <u>630 Ninth Avenue, 10th Floor, New York, N.Y. 10036</u></p> <p>I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.</p> <p>I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above identified invention described in:</p> <p><input checked="" type="checkbox"/> the specification filed herewith with title as listed above.</p> <p><input type="checkbox"/> the application identified above.</p> <p><input type="checkbox"/> the patent identified above.</p> <p>If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed on the next page and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).</p>			

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern or organization exists.
☐ each such person, concern or organization is listed below.

FULL NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization


FULL NAME _____
ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Joschim Kim
TITLE OF PERSON SIGNING 
OTHER THAN OWNER:
ADDRESS OF PERSON SIGNING: 630 Ninth Avenue, 10th Floor, New York, N.Y. 10036

SIGNATURE: _____

DATE: 9/22/00

METHOD AND APPARATUS FOR ARCHIVING MEDIA CONTENT

RELATED APPLICATIONS

5 This application claims priority under 35 U.S.C. § 119(e)
from U.S. Provisional Application No. 60/175,656 of Kim filed
January 12, 2000 which is herein incorporated by reference in
its entirety.

FIELD OF THE INVENTION

10 The present invention is directed to a method and apparatus
for archiving and delivering media content, and more
particularly to archiving television and radio broadcasts for
later delivery, on-demand, via the Internet.

BACKGROUND OF THE INVENTION

15 Years ago, the television and radio broadcasts were "live,"
meaning that the television or radio broadcast were being made
at the same time that the viewer or listener were watching or
listening. The broadcasters later found that they could pre-
20 record the shows for later broadcast. Despite this advance,
viewers or listeners still needed to watch or listen to the
broadcast at the time it was made on the local station.

Although the remainder of this application primarily
discusses the prior art and the invention with respect to

television and video, the discussion is equally applicable to radio. Accordingly, the term viewer, where the context permits, should be read to mean viewer or listener, and the term television, as the context dictates, should be read to include both video and radio. Moreover, where the term broadcast is used in connection with television, it is intended to refer to television broadcast over cable as well as television broadcast over airwaves.

Some years ago, with the advent of the VCR, television viewers were presented with the ability to "record" a broadcast - permitting the viewer to "time shift" programming. In other words, a viewer could watch a show at different time from when it was broadcast. In addition to "time shifting" the VCR presented another significant advantage -what are herein referred to as VCR-like functions, namely, the ability to fast forward, to rewind and/or to pause the playback. One drawback of a VCR is that the tape technology employed requires that the viewer wait until the entire recording is made prior to playing the recording for viewing. Recently, non-tape systems have been introduced that enable a user to play the recording without waiting for the recording to be complete. Such systems are sold under brands such as TIVO and REPLAY TV. Even using such newer technologies, viewers must remember to have the system record

the desired event. Moreover, the device has an unattended recording limit created by the media upon which the content is stored. For example, a VHS type or 8 millimeter VCR tape may typically record 2 hours, or, at a lower quality, up to 8 hours of content. Some tapes can even store more. Instead of using tapes, the TIVO and REPLAY TV systems store content digitally on, for example, computer mass storage device such as a disk. Although no tape is used, these systems can generally provide VCR-like functions. The disks sold with such systems often have capacities of a couple of hours or more, some possibly having tens of hours or more of storage capacity. Regardless of whether a viewer is using a tape system or a disk system - the media eventually fills and requires user intervention to either delete and reuse the media or to insert new media into the unit. Accordingly, viewers must know in advance what shows they desire to record, and must plan to have media available for that recording.

Another more recent change from simple broadcast television is media-on-demand. While today media-on-demand is not generally available on a wide-spread basis, it is available in some areas. A media-on-demand system is generally organized around viewing an entire "show" or movie. The media-on-demand system permits a viewer to request a particular program, and

then that program is substantially immediately delivered to the viewer. In more sophisticated media-on-demand systems, the viewer is provided VCR-like functions.

There are also means for content delivery that have become popular over the Internet, namely, downloading, Internet
5 broadcasting and streaming.

Downloading something actually means receiving a copy of it. In other words, a person desiring a particular content element (such as a show or a movie preview or even an advertisement) must locate the element from a source that makes it available for downloading, select the element, and have the source transmit the content element, via the Internet, to local storage space on that person's computer or to storage at another location accessible to that person. The downloaded content
10 element is generally stored as a file on the requester's computer, and the file is usually an exact copy of the original file that was "downloaded." When the requestor desires to view the content element, a viewing program on a computer is invoked and the downloaded file identified thereto. The viewing program
15 then displays the file. Most viewing programs for viewing moving images have VCR-like functions available to the viewer. There are a number of drawbacks to downloading. First, the content element must be completely received before it can be

viewed. In the event that, for example, the download was a half-hour television show, the download from the Internet could take a significant amount of time. Moreover, the viewer may have interest in one small portion of the entire downloaded file, and the download with respect to the remainder of that file was wasteful. Worse, the viewer may determine only seconds after beginning to view the download, that the wrong information was downloaded. Second, the viewer is not afforded random access to portions of the content element before a complete download has taken place. If the viewer desires to view a short section of the content element that starts, for example, in the middle of the content element file, the viewer must commence viewing (or at least downloading) the content from the beginning until the desired portion of the content file is reached. Another drawback of the prior art is that in order to play multiple content elements, the first stream of data must end, and a second data stream must be subsequently buffered and then played - causing a pause between content elements. There is a need for a method and apparatus to play content elements seamlessly.

To receive an Internet broadcast, a viewer selects the broadcast of interest from a source making the broadcast available, and the source thereafter "streams" the data

representing the broadcast directly to a broadcast-viewing program. Generally a broadcast-viewing program does not permit the viewer to fast-forward in a broadcast because the information "ahead" of the present position has not been broadcast yet. Moreover, a viewer cannot generally rewind a broadcast in a broadcast-viewing program. More sophisticated broadcast viewing programs may, however, permit limited VCR-like functions by storing the received broadcast information and permitting the viewer to rewinding back to the point where the particular viewer joined the live stream; and similarly to permit pausing, and to permit fast-forwarding, to catch-up to the live stream if the viewer has rewound or paused. These functions would not be unlike the functions of TIVO and REPLAY TV that permit the same type of functions with broadcast television. In any event, the viewer of an Internet broadcast is limited to viewing the portions of the broadcast that he or she received.

Streaming refers to a transmission of a content element over the Internet, the content element being destined for a stream viewing program rather than storage on a storage device. As with downloading, to stream a content element, a person must locate the element from a source that makes it available for streaming, and have the source transmit the content element, via

the Internet, to a stream viewing program. As is well known in the art, most stream viewing programs buffer the content element into temporary files. While downloading and streaming share many similar attributes, the streaming content element is usually buffered in temporary files until it is no longer needed, and the temporary files are thereafter deleted. The stream-viewing program may also provide VCR-like functions. While streaming has many advantages over downloading, it too has its drawbacks.

SUMMARY OF THE INVENTION

The present invention is directed to a method and apparatus that satisfies the need for time shifting programming, enabling a viewer to view any programming within an instant from the time it is broadcast, without the need to have cognitively recorded the program.

In addition, the present invention is directed to a method and apparatus that satisfied the need for limitless unattended recording, allowing for the recordation of every broadcast from every channel all the time.

The method and apparatus (delivery apparatus) contemplated by the present invention receives media in the form of digital or analog media signals from a variety of media sources,

including transmission through traditional broadcast, coaxial cable, the Internet, personal and public camera systems and the like, and converts these media signals into addressable blocks of media content. These media content blocks are then saved in
5 addressable format on a mass data storage device accessible by a client user.

A client user wishing to view the saved media content inputs a request to the aforementioned delivery apparatus, providing sufficient identification to describe the media content to be viewed. The apparatus then retrieves the first block of media content from the mass storage device, and transmits this media content to the client user. The delivery apparatus then retrieves the next block of media content to be viewed, "stitches" the subsequent media content to the first media block transmitted, and transmits the media block to the client user in an apparent seamless conveyance.

The present invention is directed to a system for archiving time sequenced media content from a media signal. The instant system comprises a data storage device, a capture server, and a
20 network that operatively connects the data storage device and capture server.

The data storage device is adapted to store blocks of media data in an addressable and retrievable manner. The capture server

is adapted to receive the media signal, and being operatively connected to the network, is able to write blocks of media data to the data storage device in an addressable and retrievable manner. The capture server comprising an encoder, for
5 digitizing the media signal into a time-sequence of digital frames and a corresponding audio component; a converter for converting the time-sequence of digital frames into plurality of sequential media blocks, each of the sequential media blocks comprising the data representing a consecutive number of digital frames and the corresponding audio components; a storage manager for determining an address for each of the sequential media blocks; and a storing processor, for writing each of the sequential media blocks to a location corresponding to the address determined by the storage manager.

Another embodiment of the present invention is directed to a system for archiving time sequenced media content from a digital media signal, the digital media signal having a time-sequence of digital frames and a corresponding audio component. The instant system comprises: a data storage device, a capture
15 server, and a network operatively connecting the data storage device and the capture server.

The data storage device is adapted to store blocks of media data in an addressable and retrievable manner. The capture

server is adapted to receive the digital media signal, being
operatively connected to the network, is able to write blocks of
media data to the data storage device in an addressable and
retrievable manner. The capture server comprises: a converter
5 for converting the digital media signal into plurality of
sequential media blocks, each of the sequential media blocks
comprising the data representing a consecutive number of digital
frames and the corresponding audio components; a storage manager
for determining an address for each of the sequential media
10 blocks; and a storing processor, for writing each of the
sequential media blocks to a location corresponding to the
address determined by the storage manager.

Another embodiment of the present invention is directed to a
method for archiving, on a data storage device, time sequenced
15 media content from a media signal. The data storage device is
operatively connected by a network, and is adapted to store
blocks of media data in an addressable and retrievable manner.
The network is also operatively connected to a capture server.
The capture server is adapted to receive the media signal, and,
20 via the network, write blocks of media data to the data storage
device in an addressable and retrievable manner. The instant
method comprises the steps of:

digitizing the media signal into a time-sequence of digital frames and a corresponding audio component; converting the time-sequence of digital frames into plurality of sequential media blocks, each of the sequential media blocks comprising the data representing a consecutive number of digital frames and the corresponding audio components; determining an address for each of the sequential media blocks; and writing each of the sequential media blocks to a location corresponding to the address determined by the storage manager.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a block diagram illustrating a method and apparatus for archiving and delivering media content in accordance with one embodiment of the present invention.

FIGURE 2 is a block diagram illustrating the media data stored in time driven intervals according to one embodiment of the present invention.

FIGURE 3 is a block diagram illustrating the storage manager's interaction with the media data according to one embodiment of the present invention.

FIGURE 4 is a time line illustrating the sequential steps to deliver media streams to a client.

FIGURE 5 is a block diagram illustrating the capture server's operations between media sources and the network.

DETAILED DESCRIPTION OF THE INVENTION

5 A block diagram illustrating a method and apparatus for archiving and delivering media content in accordance with one embodiment of the present invention is shown in Figure 1. This embodiment is shown in simplified form for the purpose of clarity. However, the method comprising the present invention is designed to replicate well beyond the size depicted here.

10 Capture server 100 is an apparatus for receiving and gathering a plurality of media sources for archiving and subsequent delivery to client users. Capture server 100 is capable of receiving numerous digital or analog media signals from a variety of media sources, including transmission through
15 traditional broadcast, coaxial cable, the Internet, personal and public camera systems and the like, and converting these media signals into addressable blocks of media content. Furthermore, capture server 100 is capable of encoding received media
20 signals, particularly analog media signals, applying an application programming interface and preparing the media signals for implementation by the system in an identifiable form or architecture.

Media sources 105(a) through (e) are a plurality of media sources transmitting media content to the system via capture server 100. The media may be in analog form, for example, as produced by television or radio broadcast, cable television or camera signal; or digital format, such as transmitted by particular Internet applications.

Network 110 is a network connecting various client users, media content, servers and storage devices. In one embodiment of the invention, network 110 is a connectionless network or datagram service between stations, commonly referred to in today's parlance as the Internet. Network 100 is capable of providing the necessary data communication service between the client users, distribution servers, media sources data storage devices and capture servers.

Distribution server 115 is an apparatus for receiving media requests from a client user over network 115, determining the location of the requested media data on the network, and directing the transmission of the requested media to the client user via network 100. A distribution server may be part of a distribution hierarchy, where each distribution server may have one or more parents and/or children distribution servers. In this embodiment, each parent or child distribution server will

have their own media data storage and cost associated with transmitting particular media content to a requester.

When directing the transmission of media data, Distribution server 115 may apply a "cost" algorithm to ensure the transmission is made through the most efficient distribution server. Efficiency, i.e., cost, may be based on several parameters including, for example, transmission time, latency, delivery time, protocols, quality of services, physical delivery costs, distribution server load, network throughput (load), effective bandwidth, etc., or any combination of the same. Distribution server 115 may redirect the transmission of media data to other distribution servers based on the "cost" algorithm and efficiency model. Distribution server 115 also is capable of "stitching" separate media content blocks together for transmission to the requesting client user as an apparently seamless stream of media data.

If the media content is streamed too fast, a number of problems occur. First, if a user decides not to consume all of the delivered media some or much of the delivery may be wasted. Moreover, if the user does consume the delivery, the user's local buffer will overfill and cause an overrun condition. An overrun condition may result in losing delivered content, which causes the delivery to have a "cost" greater than would be

necessary; and, it may also cause degradation to the user's content - such as "skipping."

On the other hand, if the media content is streamed too slow, other problems occur, referred to as an under run
5 condition. When an under run occurs, the user's viewer has no data available to display - and thus freezes, causing jerkiness in the playback.

To overcome these problems, the distribution server 115 is capable of "throttling" the delivering of media content to the client user to facilitate a reduction or elimination of overrun and under run conditions of the media content. Throttling refers to the control of the speed of delivery. In one embodiment of the invention, this throttling function is based on the captured bit rate of the content media. In other words,
10 if the content media was captured at a given frame rate, the throttling function attempts to delivers the content media to the user at the same average bit rate after making a provision for buffering at the user side. The distribution server 115 may also have the ability to cache incoming media content to
15 increase system efficiency and speed.
20

Data storage 120 is a collection of all media content received and transformed by capture server 100 into media blocks. Data storage 120 may comprise any type of magnetic,

optical or similar mass data storage device capable of storing blocks of media data for future retrieval. In one embodiment of the invention, data storage 120 may comprise: on-line block data storage devices such as disk drives; near-line storage devices
5 such as tape drives; and off-line storage devices, such as tape libraries. The distribution server 115 may also work in conjunction with data storage 120 to perform caching and replication operations.

Although the embodiment above describes only a single data storage 120, it will be apparent to one of skill in the art that
10 multiple data storage systems may be used to provide load distribution, data redundancy and/or data distribution. The data storage systems, such as data storage 120, may be individually or commonly connected to the Network 110.

In one embodiment of the invention as depicted in Figure 1,
15 media sources 105(a) through (d) supply media content directly to capture server 100. In an embodiment of the invention as depicted in Figure 1, media content 105(a) is a cable television broadcast received via coaxial cable lines, media content 105
20 (b) is a traditional network television broadcast, media content 105 (c) is a transmission from a public video camera (for example a "traffic cam"), and media content 105 (d) is satellite television broadcast received via satellite transmission. In

addition, media source 105(e) supplies media content to capture server 100 over the network in digital format. Although five media sources are shown for the purpose of this example, any number of media sources may be input to capture server 100. In
5 a preferred embodiment of the invention, a media source is input into capture server 100 for each particular television channel and radio station for a particular locale.

Capture server 100 gathers the incoming media content and organizes the data stream into content media blocks. The content media blocks may be of a fixed or non-fixed unit file size. In
10 one embodiment of the invention, the content media blocks are based on atomic unit time blocks. In a preferred embodiment of the invention, the data stream is organized into time blocks of approximately one minute. The data stream, however, may be
15 organized into longer or shorter time blocks. In another embodiment of the invention, the content media blocks may comprise non-unit size blocks.

Preferably, capture server 100 then encodes the incoming analog media content signals into a digital format, and applies
20 an application programming interface (API) to all digital data to achieve a consistent format. Capture server 100 then transmits the media blocks to data storage 120 via network 110 for storage in an addressable format. In one embodiment of the

invention, the addressable format used by capture server 100 to store data to data storage 120 is a directory tree represented as: source-channel/year/month/day/hour/minute/seconds, where "seconds" is the actual file.

5 Capture server 100 may also gather and store Close Caption Data (CCD) associated with the saved media content as a text media block file in data storage 120. CCD is the textual equivalent of any articulated word in the media content. As with the media content block, the text media block may be of a fixed or non-fixed unit file size. However, in a preferred embodiment, the text is stored by the whole word, i.e. the words comprising the text media block can not be truncated.

002260-09395

15 The text media block is preferably stored in proximal time relation with the content media block. Because the text media block comprises whole words, the text may not be frame aligned with the content media block. In a preferred embodiment, the text in the text media block is adjusted forward or backward to ensure that the text begins or ends with the whole word articulated in the corresponding content media block.

20 In another embodiment of the invention, the text media block comprises whole words, not necessarily in proximal time relation with the content media block. In this embodiment, each text media block is associated with a content media block

reference code, for example, a time code or a frame code. This reference code allows the text media block to be related back to the content media block containing the articulated text.

10 To retrieve media content from the system, client user 130
5 places a request to distribution server 115 for a selection of media content to be viewed. In one embodiment of the invention, distribution server 115 contacts data storage 120 and requests a copy of the first block of client requested media content. Data storage 120 then transmits the first requested media content block to distribution server 115. Once received, distribution server 115 transmits the first media content block to client user 130.

15 During transmission of the first block of requested media content to client user 130, a recursion subroutine automatically requests a copy of the second block of client requested media content. Data storage 120 transmits this second block of media content to distribution server 115, where the second media content block is "stitched" to the first media content block for apparent seamless transmission to client user
20 130. The method of transmitting media back to back for transmission to an end user is well known to a person of ordinary skill in the art. However, the present method of

"stitching" media together for apparent seamless transmission is believed to be new.

This method is repeated until terminated by client user 130, or until the request for the media content has been
5 satisfied.

Media content can also be retrieved by using a Close Caption filter (CC filter) to search the CCD text media blocks for selected key words. Once the key word is found in a CCD text media block, the media content block associated with the
10 text media block is determined. A request is placed to distribution server 115 for a selection of media content commencing with this media content block. The media content is then transmitted to the requestor as described above.

In one embodiment of the invention, the CC filter contains
15 different rules that can be applied to the CCD text media blocks. These rules may include, for example, a start point, stop point, word by word search criteria, phrase by phrase search criteria or uniform resource locator (URL). When performing a search on the CCD text media blocks, encountering
20 text that satisfies any of these rules will trigger the activity associated with the rule. For example, a rule may request video of the Channel 4 evening news commencing when the word "sports" is encountered, and continuing for 5 minutes thereafter. When

received, the CCD text media blocks associated with the Channel
4 evening news are searched until the word "sports" is
encountered. A video starting point is established by
determining which media content block is associated with the
5 text media block containing the word "sports". Once
established, the distribution server 115 obtains 5 minutes of
media content blocks, commencing with the video starting point,
from data storage 120. Similarly, if the text media block
contains a URL, the rule may trigger an activity associated with
that URL.

A block diagram illustrating the media content blocks
stored in time driven intervals according to one embodiment of
the present invention is shown in Figure 2. This embodiment is
shown in simplified form for the purpose of clarity. However,
15 the method comprising the present invention is designed to
replicate well beyond the size depicted here.

Content media blocks 200, 210 and 220 are three sequential
one-minute media content blocks for a given media content.
Although one-minute media content blocks depict one embodiment
20 of the present invention, the time increment for each block is
not significant, and any time interval may be used provided that
the media content block comprises an integral number of frames.
Moreover, the frames, which may be full frames and/or delta

frames are arranged such that each media content block is a viewable unit - in other words, all of the frames in the media content block may be viewed without reference to data regarding other frames. In a preferred embodiment of the invention, each media block begins with one full frame, and thereafter, comprises one or more delta frames. Alternatively, each media block may begin with one full frame, and thereafter comprise a combination of full and delta frames, however, this is not essential for the operation of the invention. It is also contemplated by the present invention that each media content block may comprise only one or more full frames, and no delta frames.

As is well known in encoding, such as MPEG encoding, a full frame is a complete frame of the media content that may be displayed without reference to data from other frames. Delta frames represent only the changes or "delta's" in media content from the previously displayed frame. Placing a full frame at the beginning of each media content block ensures that a client user will see a complete frame at the beginning of the media content block, regardless of which media content block is the start point. Delta frames indicate only changes in the media content from frame to frame, greatly reducing the file size of each media content block. The storage and playback from media

media content blocks 210 and 220, respectively, and remaining frames 212 and 222 represent delta frames for media content blocks 210 and 220, respectively. In the example, each media content block 200, 210, 220 represents one minute of media content. In a preferred embodiment, each media content block 200, 210 and 220, comprises frames of media content corresponding to between 1 and sixty seconds of media content. The invention, however, contemplates media content blocks having sizes that could range from as small as a single frame, to minutes, or even hours worth of frames, depending upon the type of media content being stored, and the likely required access thereto. A determination of the number of frames within each block will be within the skill in the art. It is important to note that each of the media content blocks can be delivered to a viewer, which can reproduce the entire block of media content without reference to any other media content block or other frame data. Accordingly, the media content blocks do not necessarily have to be delivered to the viewer in time sequence order.

In delivery of media content blocks 200, 210, 220 to a viewer (not shown), the first media content block 200 to be viewed is delivered as it is stored. When the second and third media content blocks 210, 220 are appended to the end of the

preceding media content block 200, 210, respectively, they are "stitched" to the preceding block, providing a seamless stream of data to the viewer. Accordingly, using the present invention, the viewer is "unaware" that the media content is being provided from separate files, but instead, views the data as though it is a single continuous stream.

A block diagram illustrating a storage manager's interaction with the media content according to one embodiment of the present invention is shown in Figure 3. This embodiment is shown in simplified form for the purpose of clarity. However, the method comprising the present invention is designed to replicate well beyond the size depicted here.

Storage manager 300 controls the movement of media content on the system and interacts with the distribution server (not shown), data storage 120 and meta-data 340 over network 110.

In one embodiment of the invention, data 120 comprises on-line data storage 310, near-line data storage 320 and off-line data storage 330. On-line data storage 310 is a device or devices capable of storing and retrieving media content in a timely fashion. In one embodiment of the invention, on-line data storage 310 is a mass media storage device such as a hard disk. In another embodiment of the invention, on-line data storage 310 is an optical disk storage device. In still further

embodiments of the invention, on-line data storage 310 is any device capable of storing and retrieving mass media data in a timely fashion.

5 Near-line data storage 320 is a device or devices capable of automatically retrieving data stored remotely in a timely fashion. In one embodiment of the invention, near-line data storage 320 is a tape drive system.

10 Off-line data storage 330 is a device or devices capable of long term archival of saved media content. In one embodiment of the invention, off-line data storage 330 comprises tape libraries.

15 Meta-data 340 is a collection of information or data for all media content blocks created by capture server 100 and stored on data storage 120. Meta-data 340 may comprise any type of magnetic, optical or similar data storage device capable of storing blocks of data for future retrieval. In one embodiment of the invention, meta-data 340 comprises a single on-line data storage device. Alternatively, meta-data 340 may comprise a plurality of on-line data storage devices, either commonly, or
20 individually connected to the Network 110. Where a plurality of on-line storage devices is employed, as will be apparent to one of skill in the art, it may provide load distribution, data redundancy and/or data distribution. Examples of typical data

stored in meta-data 340 are shown in the following database schema table, although this meta-data is not essential for operation.

I. CHANNEL TABLE

Field Name	Type	Definition
Channel_id	Integer	Identifier used to internally refer to a channel
Channel_name	Character	Public name of the channel
Channel_logo	Character	Base URL reference for an image representing the channel

II. MIME TYPES TABLE

Field Name	Type	Definition
Mime_type_id	Integer	Internal reference id for a specific delivery mime type
Mime_type	Character	HTTP mime type used for delivery.

III. PROGRAM TABLE

Field Name	Type	Definition
Program_id	Integer	Internal identifier representing a reference to a specific program
Program_name	Character	Public name of a program.
Program_keys	Character	Public keys to allow search for a program by keywords.

IV. FILE LOCATION TABLE

File_location_id	Integer	Internal identifier used to reference the location of a collection of video clip segments.
File_location	Character	Base path to the storage location.

Video Clip Table

Video_id	Integer	Internal id used to reference a single video segment
Channel_id	Integer	Identifier for the channel that the video segment belongs.
Start_time	Datetime	Starting date and time of the video segment.
Duration	Integer	Length of the video segment in seconds.
Filename	Character	File name of the video segment minus the storage location.
Program_id	Integer	Id from the program table representing the program that this clip belongs.
Bit_rate	Integer	Indexed value representing the capture rate.
Resolution	Integer	Indexed value representing the capture resolution.

Availability	Integer	Indexed value representing whether the video segment is directly available, in near-line storage or offline storage.
Mime_type_id	Integer	Id from the mime type table representing the delivery mime type.
File_location	Integer	Id from the file location table representing the storage location of the video segment.
Remote_capture_status	Integer	Index value used to by remote capture systems to determine the availability status of video segments that have been capture by remote systems.

Storage manager 300 performs various "housekeeping" functions on the media content received and formatted by capture server 100 (not shown). For example, storage manager 300 tracks the age and popularity of the media content, and archives various less active or older selections. This may include transferring data between on-line data storage 310, near-line data storage 320 and off-line data storage 330 depending on the

age and client use of the media content. In one embodiment of the invention, new or active media content will be kept in on-line media data storage 310 for quick access. Less active or older media content will be kept in near-line data storage 320 for reasonable automatic access when requested. Finally, old or inactive media content will be kept in off-line data storage 330 for archival purposes.

Storage manager 300 may also perform replication functions to assure that adequate copies of particular media content exists to satisfy the demands of client users. In one embodiment of the invention, if a particular selection of media content is popular, frequently being chosen by client users, storage manager 300 may create multiple copies of the particular selection for storage in data storage 120.

Storage manager 300 also performs retrieval function, and interacts with distribution server 115 (not shown) to retrieve and supply media content of near-line and off-line media content when selected by a client user. The storage manager 300 may also communicate with another distribution server (not shown) to determine whether the other distribution server is maintaining a copy of the media content requested.

From time to time, media content requested by a client user might be off-line or near-line. In those particular

circumstances, the distribution server must communicate with the storage manager to determine if near-line or off-line data may be received. A time line illustrating the sequential steps to deliver off-line or near-line media content streams to a client is shown in figure 4.

In one embodiment of the invention, client user 130 makes a request to distribution server 115 for a stream of media content "X" in step 400. The request comprises an indication of the stream, a reference to the desired beginning point of the stream, and the duration or termination point of the stream. In a preferred embodiment, a zero may be used in lieu of the duration or termination point to indicate that the request is for delivery of the stream until terminated.

In a preferred embodiment, where multiple distribution servers are deployed, the distribution server 115 determines whether another distribution server could more efficiently fulfill the request. If so, the distribution server 115 would forward the request to such a distribution server for fulfillment at a "lower cost," otherwise, the distribution server 115 would fulfill the request.

The distribution server 115 that will fulfill the request translates it by determining where the corresponding data is located. In other words, the distribution server 115 uses the

request to determine the file name of the media content blocks corresponding to the request. In a preferred embodiment, the distribution server 115 sends a request for such translation - that is, for the location of the content - to the Storage Manager 300, as in step 410.

Step 420 shows that the distribution manager 300 responds to the request by providing to the distribution server 113 the content location.

The distribution server 115 then retrieves the media content block from the data storage 120, and initiates the stream of media content to the client 130. To initiate the stream of media content to the client 130, the distribution server 115, among other things, sends a header indicating the length and/or duration of the playback. The distribution server 115 will thereafter transmit the first block of media content, and will stitch each successive media content block together as part of the single stream being transmitted to the client 130. The transmission of the stream is throttled by the distribution server 115.

It will be apparent to one of skill in the art that, for a given stream of media content, the client 130 need only make a single request to the distribution server 113 as shown in step 400. The distribution server 115, on the other hand, can either

resolve a number of requests for the location of content relating to the stream at once, or alternatively, and preferably, will successively make and have location of content requests fulfilled, as shown in steps 410 and 420.

5 A block diagram illustrating the capture server's operations between media sources and the network is shown in Figure 5. This embodiment is shown in simplified form for the purpose of clarity. However, the method comprising the present invention is designed to replicate well beyond the size depicted here.

10 Capture server 100 comprises: encoders 505 and 506; vender application programming interfaces (API's) 510 and 511; API glue layers 515, 516, and 517; data acquisition abstraction layer (DAAL) 520 and capture server interface 525. Capture server 100 receives one or more digital or analog media signals from a variety of media sources. These signals may include network-broadcast signals, cable transmission signals, satellite transmission signals and Internet transmissions. Capture server 100 may receive analog media signals from media sources 500 and 15 501; and digital media signals from media source 502. Capture server 100 digitizes the signals (if necessary), and converts the digital media signals into addressable blocks.

Encoders 505 and 506 represent analog to digital encoders used to encode the analog signal into digital signal format. As shown in Figure 5, the encoder 505 may be a Moving Picture Expert Group (MPEG) encoder and the other encoder 506 may be an Audio Video Interleave (AVI) encoder. The use of MPEG and AVI encoders to encode analog signals into digital signals is well known in the art. Encoder 505 converts analog MPEG media source signal 500 into a digital format for further processing by capture server 100. Similarly, encoder 506 converts analog AVI media source signal 501 into a digital format for further processing by capture server 100.

Vendor API 510 is an MPEG application programming interface. In one embodiment of the invention, API 510 is provided by the vendor supplying encoder 505 and is a hardware or software apparatus used to control encoder 505.

Vendor API 511 is an AVI application programming interface. In one embodiment of the invention, API 511 is provided by the vendor supplying encoder 506 and is a hardware or software apparatus used to control encoder 506.

In a preferred embodiment, no encoder or vendor API is required for the digital media source 502. The digital media source may originate in the capture server 100 in the form of an MPEG or AVI, or alternatively, in the form of a BMP, GIF or

JPEG, or other file type. The digital media source 502 may be transported to the capture server 100 via, for example, FTP, NNTP or RTSP, or another protocol that is capable of conveying digital information of that type. See, for example, 105E in

5 Figure 1.

The API glue layers 515, 516 and 517 are hardware or software apparatus designed to transform the vendor API operations and/or the transport protocols into apparently uniform operations, so digital information is received in a consistent way.

10 Data acquisition abstraction layer (DAAL) 520 acts as a buffer and acquires transformed media content data from each media source and holds the media content for capture server interface 525. In the embodiment of the invention shown in Figure 5, the DAAL 520 receives uniform media content from API glue 515, 516 and 517 and buffers this incoming data before processing by capture server interface 525.

15 Capture server interface 525 receives the media content from the DAAL 520, forms the media content blocks, and prepares meta-data for each media content block. Capture server interface 525 then saves this meta-data in an addressable form in meta-data storage (not shown) using network 110. Similarly

capture server interface 525 saves the addressable media content blocks to data storage (not shown) using network 110.

As media content is passed through the API glue layer 515, 516 and 517, DAAL 520 and the capture server interface 525 it is organized and transformed into addressable content media blocks. This process is also referred to as a uniform transformation process. The addressable content media blocks resulting from the uniform transformation process permit later retrieval, beginning randomly at any block, by client users. Thus, the uniform transformation process transforms encoded media content from media source 500 into uniform data blocks. In one embodiment of the invention, the data blocks may all have equal size, being one minute in length.

In a further embodiment of the invention, a network transcoder (not shown) may be employed to change the media content data before DAAL 520. Changes performed by the network transcoder may include changes in resolution, format, etc. The network transcoder may be installed at any point in capture server 100 before DAAL 520.

While the foregoing describes and illustrates the preferred embodiment of the present invention and suggests certain modifications thereto, those of ordinary skill in the art will recognize that still further changes and modifications may be

WHAT IS CLAIMED:

1. A system for archiving time sequenced media content from a media signal, the system comprising:

(a) a network;

5 (b) a data storage device operatively connected to the network, the data storage device being adapted to store blocks of media data in an addressable and retrievable manner;

10 (c) capture server, being adapted to receive the media signal, and being operatively connected to the network thereby being able to write blocks of media data to the data storage device in an addressable and retrievable manner, the capture server comprising:

15 (i) encoder, for digitizing the media signal into a time-sequence of digital frames and a corresponding audio component;

20 (ii) converter for converting the time-sequence of digital frames into plurality of sequential media blocks, each of the sequential media blocks comprising the data representing a consecutive number of digital frames and the corresponding audio components;

(iii) storage manager for determining an address for each of the sequential media blocks; and

(iv) storing processor, for writing each of the sequential media blocks to a location corresponding to the address determined by the storage manager.

2. A system as claimed in claim 1, wherein the consecutive number of digital frames is a predetermined number.

3. A system as claimed in claim 2, wherein the network is a wide-area network.

4. A system as claimed in claim 2, wherein the network is a storage area network.

5. A system as claimed in claim 2, wherein the encoder is one from the group consisting of an MPEG encoder, and an AVI encoder.

6. A system as claimed in claim 2, wherein the media signal is one from the group consisting of a broadcast channel television signal, a cable channel signal, and a satellite channel signal.

7. A system as claimed in claim 2, wherein the predetermined consecutive number of digital frames corresponds to a period between 1 second and 5 minutes.

8. A system as claimed in claim 2, wherein the predetermined consecutive number of digital frames corresponds to a period of approximately 1 minutes.

5 9. A system for archiving time sequenced media content from a digital media signal, the digital media signal having a time-sequence of digital frames and a corresponding audio component, the system comprising:

(a) a network;

10 (b) a data storage device operatively connected to the network, the data storage device being adapted to store blocks of media data in an addressable and retrievable manner;

15 (c) capture server, being adapted to receive the digital media signal, and being operatively connected to the network thereby being able to write blocks of media data to the data storage device in an addressable and retrievable manner, the capture server comprising:

20 (i) converter for converting the digital media signal into plurality of sequential media blocks, each of the sequential media blocks comprising the data representing a

consecutive number of digital frames and the corresponding audio components;

(ii) storage manager for determining an address for each of the sequential media blocks; and

5 (iii) storing processor, for writing each of the sequential media blocks to a location corresponding to the address determined by the storage manager.

10. A system as claimed in claim 9, wherein the consecutive number of digital frames is a predetermined number.

10 11. A system as claimed in claim 10, wherein the network is a wide-area network.

12. A system as claimed in claim 10, wherein the network is a storage area network.

15 13. A system as claimed in claim 10, wherein the digital media signal is one from the group consisting of an MPEG signal or an AVI signal.

14. A system as claimed in claim 10, wherein the predetermined consecutive number of digital frames corresponds to a period between 1 second and 5 minutes.

15. A system as claimed in claim 10, wherein the predetermined consecutive number of digital frames corresponds to a period of approximately 1 minutes.

16. A method for archiving on a data storage device time sequenced media content from a media signal, the data storage device being operatively connected a network, and being adapted to store blocks of media data in an addressable and retrievable manner, the network also being operatively connected to a capture server, the capture server being adapted to receive the media signal, and, via the network, the capture server being adapted to write blocks of media data to the data storage device in an addressable and retrievable manner, the method comprising the steps of:

(a) digitizing the media signal into a time-sequence of digital frames and a corresponding audio component;

(b) converting the time-sequence of digital frames into plurality of sequential media blocks, each of the sequential media blocks comprising the data representing a consecutive number of digital frames and the corresponding audio components;

(c) determining an address for each of the sequential media blocks; and

(d) writing each of the sequential media blocks to a location corresponding to the address determined by the storage manager.

ABSTRACT OF THE INVENTION

The present invention is directed to a method and apparatus for archiving media content, and more particularly to archiving television and radio broadcasts for later delivery, on-demand, via the Internet. A capture server is used to receive and gather a plurality of media sources for archiving and subsequent delivery to client users. The capture server is capable of receiving numerous digital or analog media signals from a variety of media sources, including transmission through traditional broadcast, coaxial cable, the Internet, personal and public camera systems and the like, and converting these media signals into addressable blocks of media content. Furthermore, the capture server is capable of encoding received media signals, particularly analog media signals, applying an application programming interface and preparing the media signals for implementation by the system in an identifiable form or architecture.

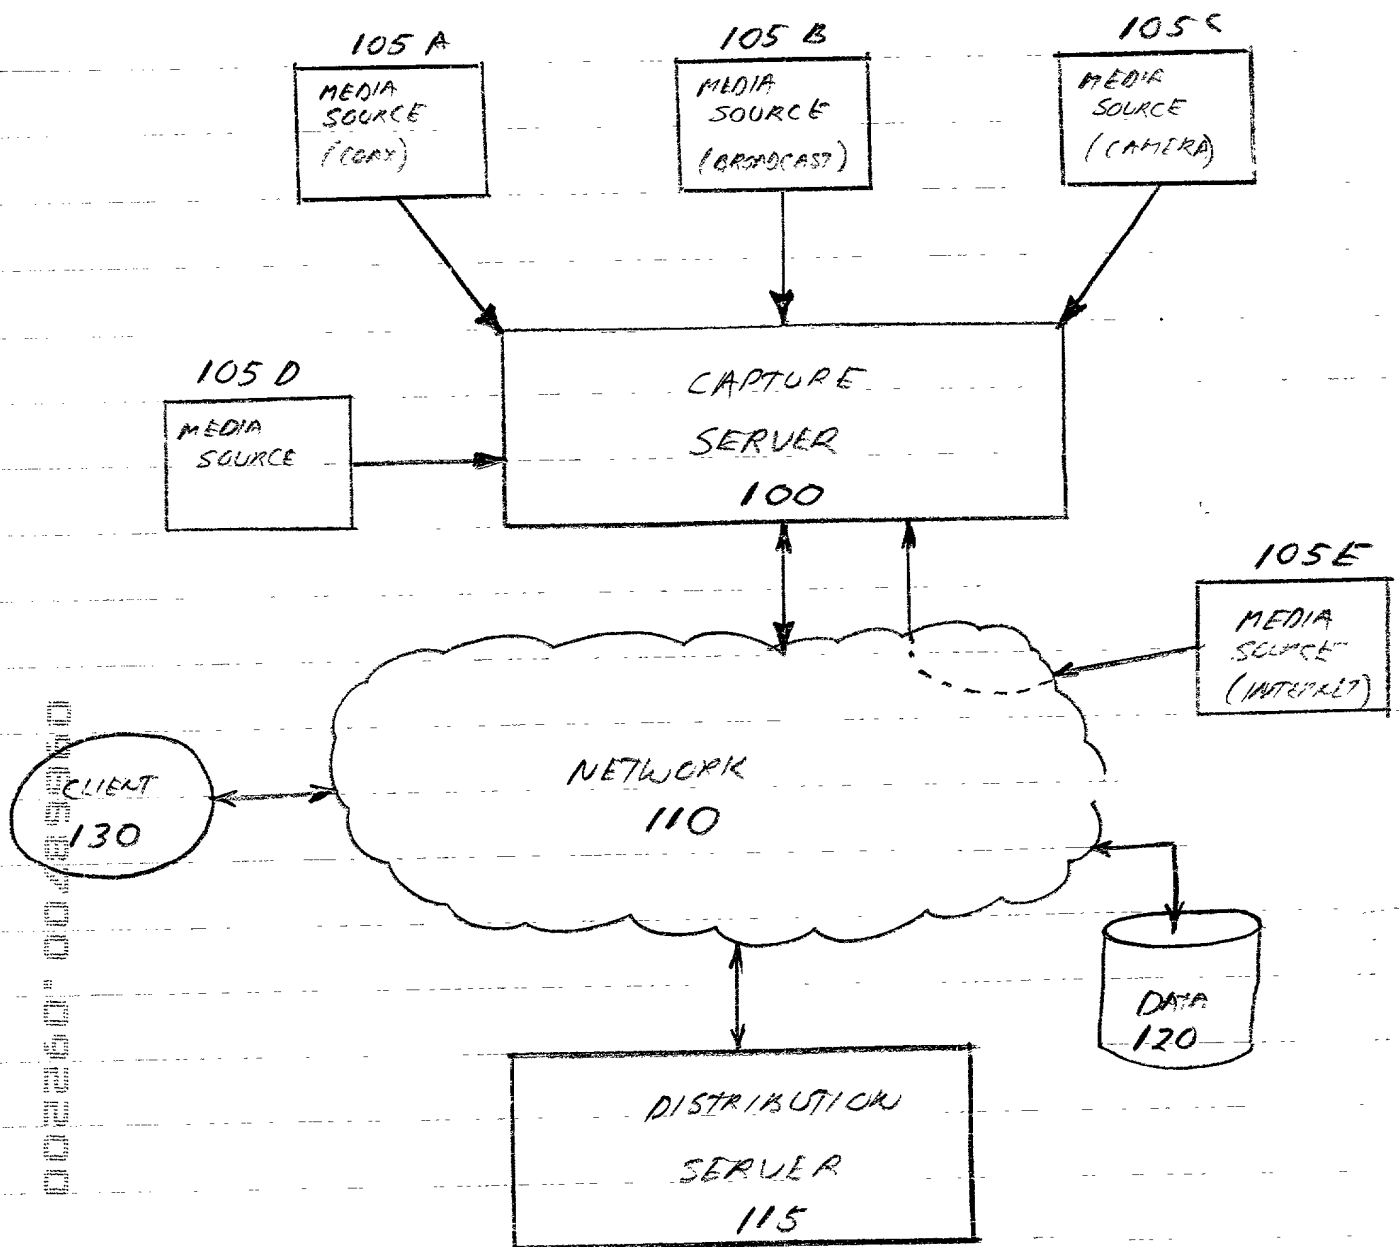


FIGURE 1

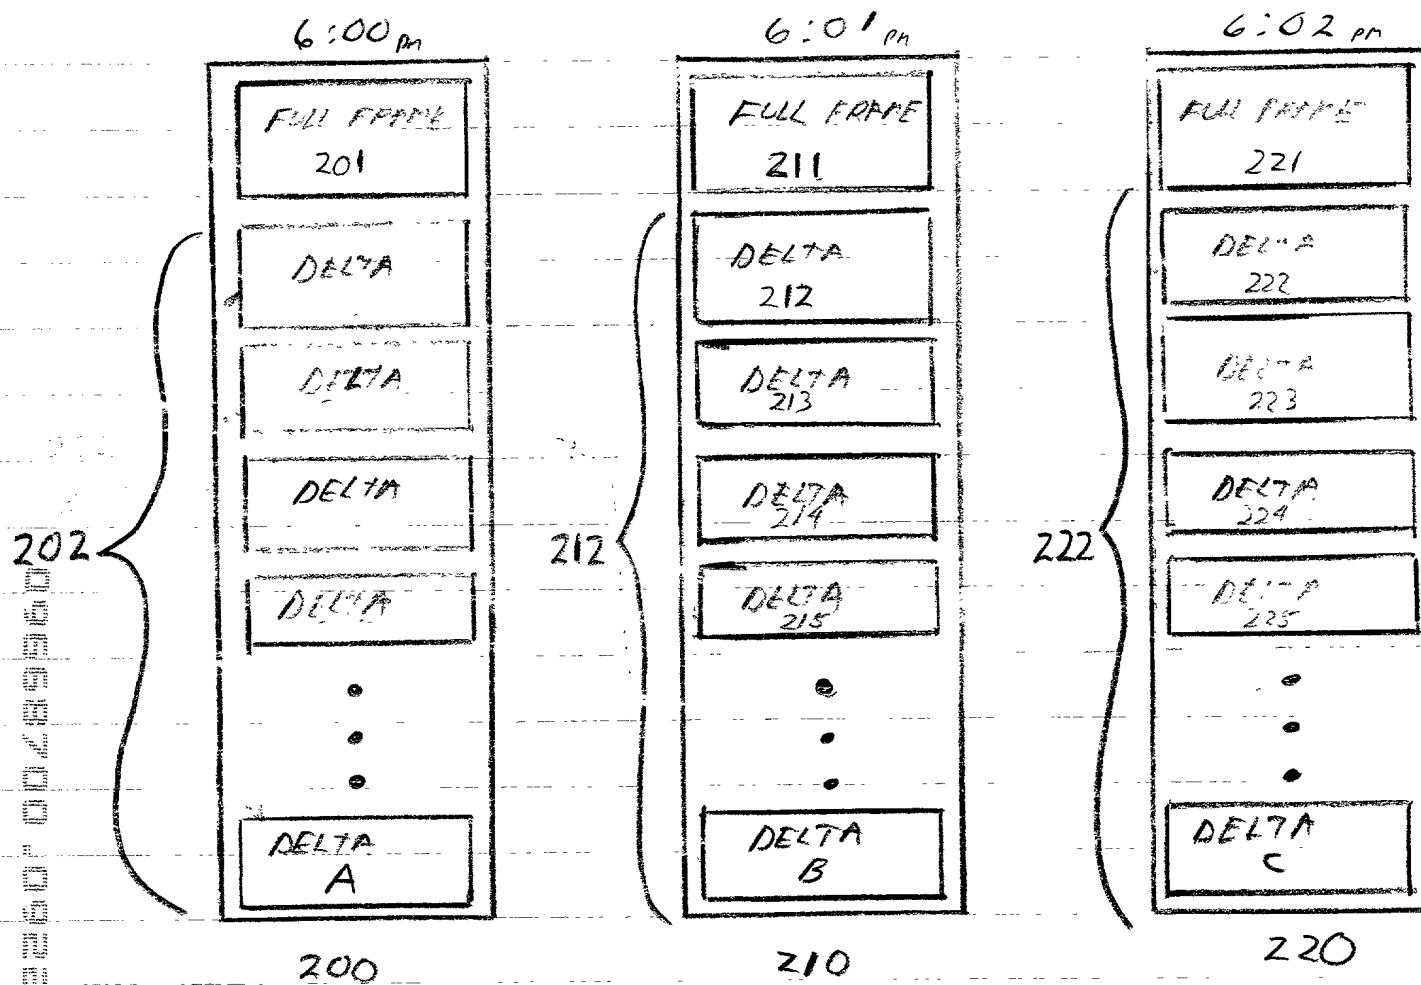


FIGURE 2

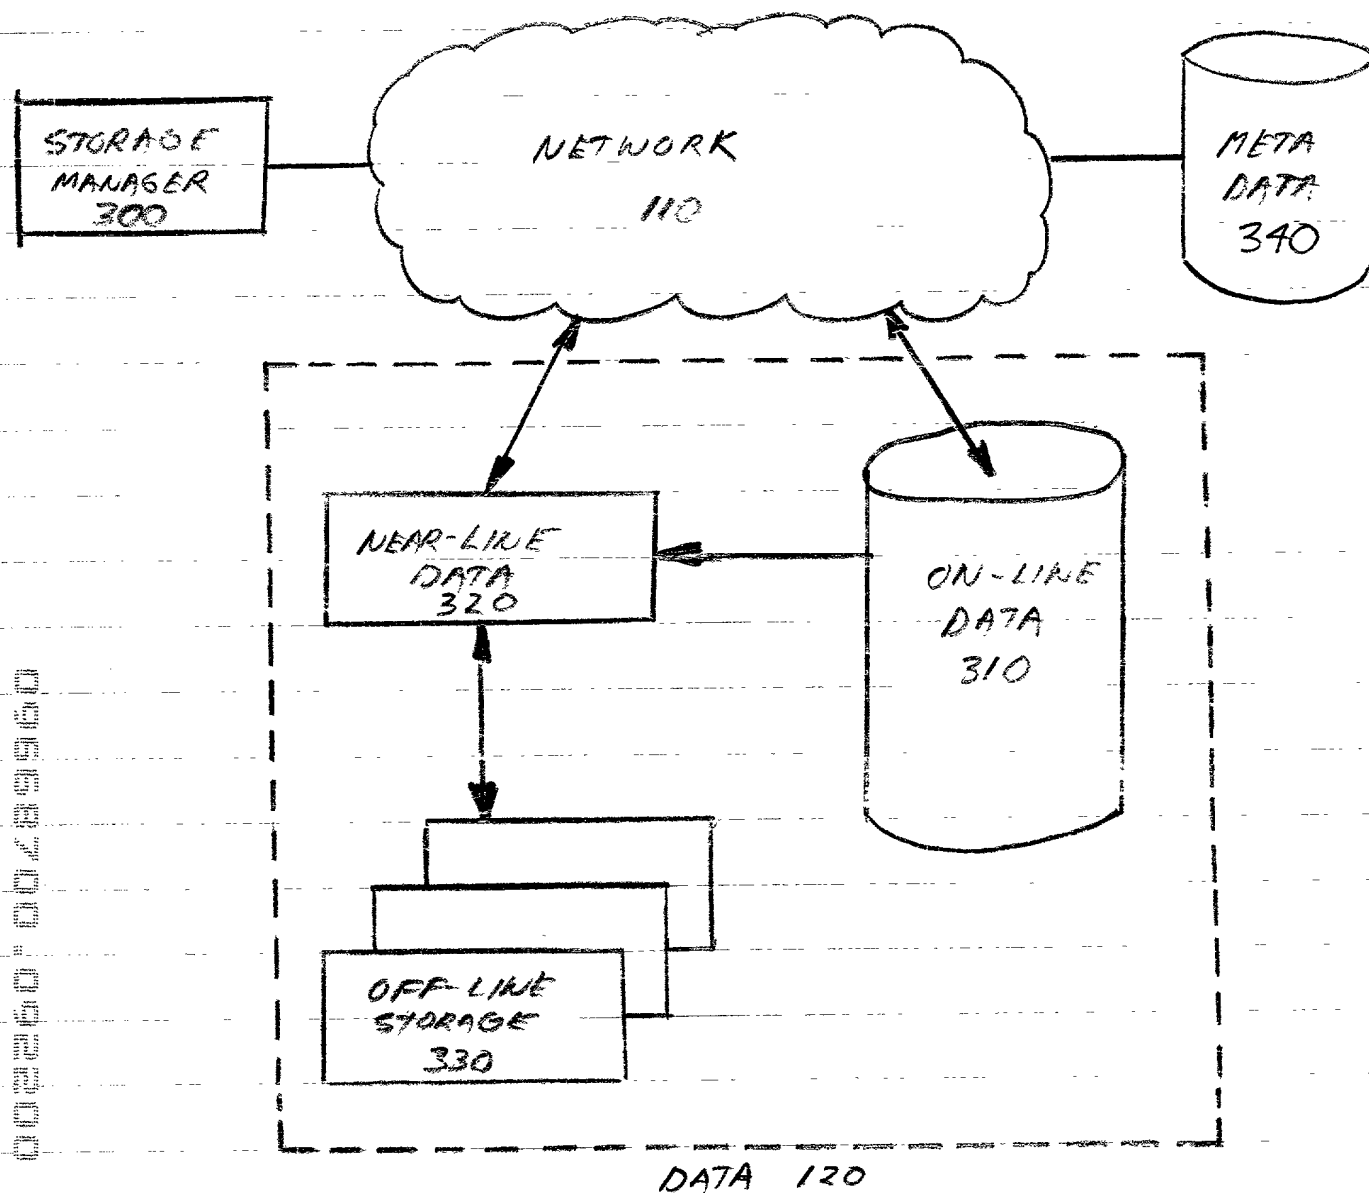


FIGURE 3

002260 00/089900

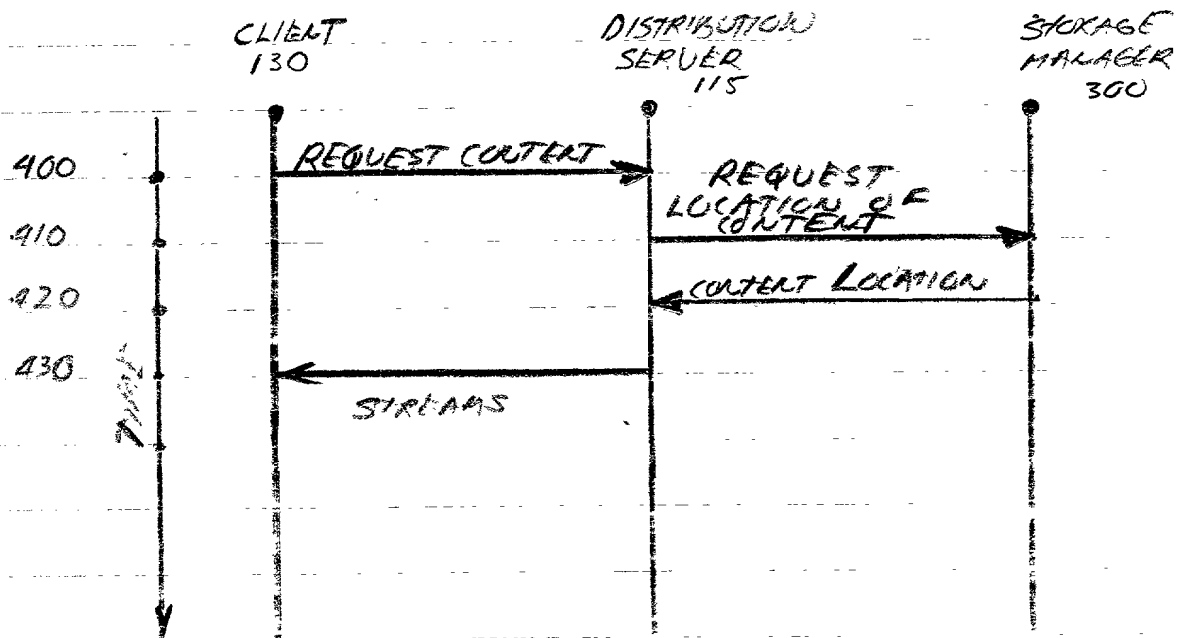


FIGURE 4

002260 0099960

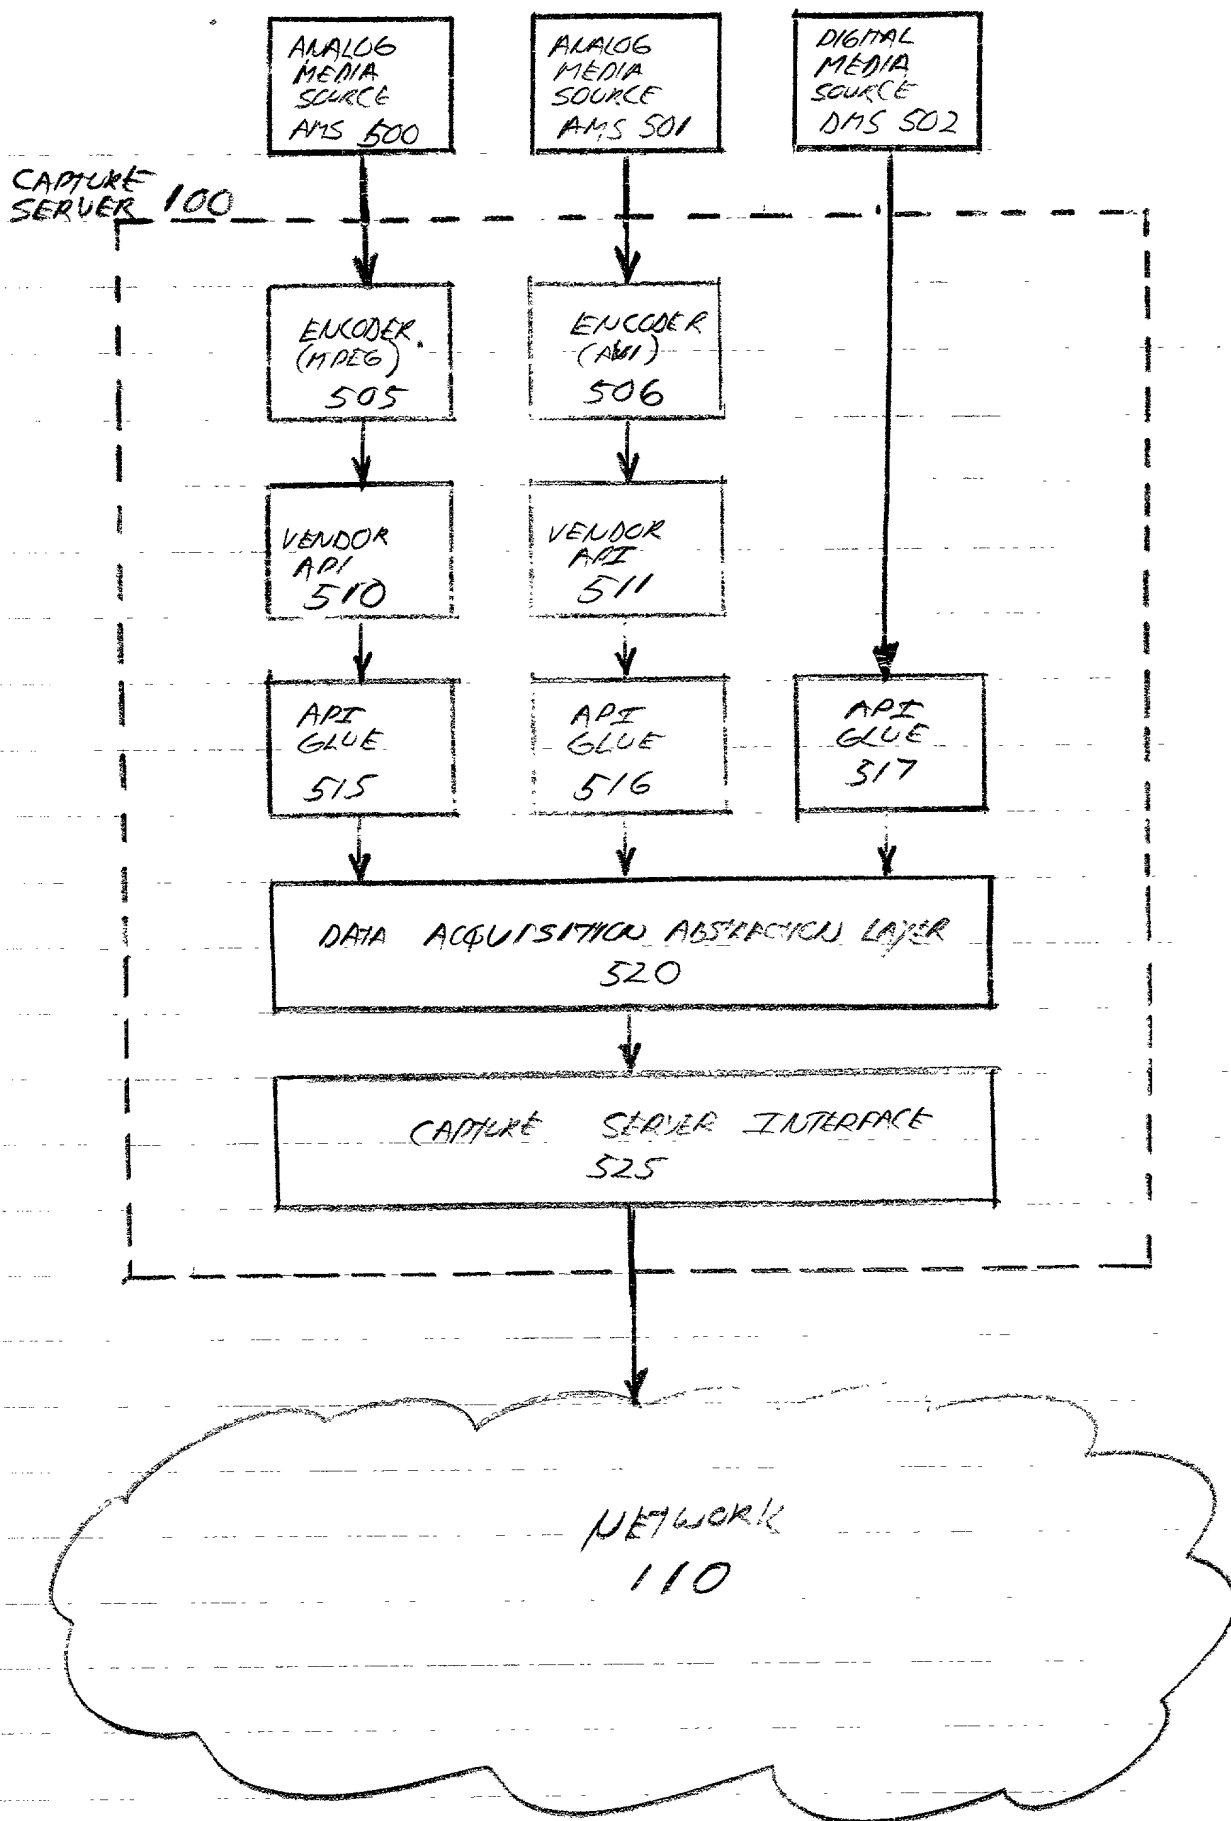


FIGURE 5

Docket No.
 44400.610100

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 385(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

<u>60/175,656</u>	<u>01/12/00</u>
(Application Serial No.)	(Filing Date)
<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)
<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Albert L. Jacobs	Reg. No. 22,211
Jesse D. Reingold	Reg. No. 20,461
Eugene C. Rzuicldo	Reg. No. 31,900
Gerard F. Diebner	Reg. No. 31,345
Joseph M. Manak	Reg. No. 33,013
Adam B. Landa	Reg. No. 35,236
Mark Farley	Reg. No. 33,170
Alan Force	Reg. No. 39,673
Vincent Sarrazo	Reg. No. 47,072

Send Correspondence to: Eugene C. Rzuicldo
 GREENBERG TRAURIG, LLP
 885 Third Avenue - 21st Floor
 New York, N.Y. 10022-4834

Direct Telephone Calls to: *(name and telephone number)*
 Eugene C. Rzuicldo (212) 843-1046

Full name of sole or first inventor Joachim Kim	9/22/00
Sole or first inventor's signature 	Date
Residence 360 Central Park West, Apt. 12G, New York, N.Y. 10025	
Citizenship USA	
Post Office Address	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of third inventor, if any	
Third inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of seventh inventor, if any	
Seventh inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of eighth inventor, if	
Eighth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of ninth inventor, if any	
Ninth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of tenth inventor, if any	
Tenth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): Joachim Kim

Docket No.

44400.010100

Serial No.
TBAFiling Date
09/22/00Examiner
TBAGroup Art Unit
TBA


Invention: METHOD AND APPARATUS FOR ARCHIVING MEDIA CONTENT

I hereby certify that this Declaration and Power of Attorney For Patent Application
(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on
09/22/00
(Date)

Fatima Rodriguez

(Typed or Printed Name of Person Mailing Correspondence)

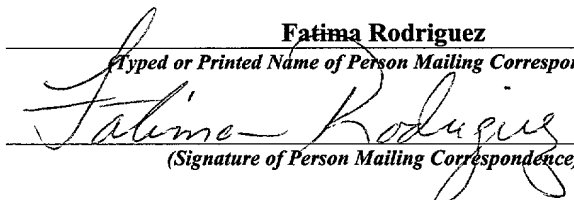


(Signature of Person Mailing Correspondence)

EM074605931US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

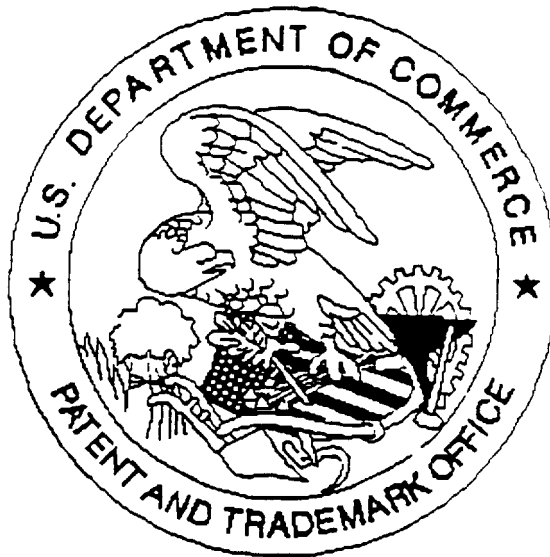

Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available. *drawings*